




1. Plug power cord into 115V AC outlet and adjust timing dial to desired setting.

Optional choice of sealing or cut-and-seal. For this info set, sealing alone is shown in pictures, but cut-and-seal is also described in the text. For cut-and-seal, adjust timer to a higher setting to reduce bag tear-away action. The LED will turn off indicating cut-and-seal is complete.

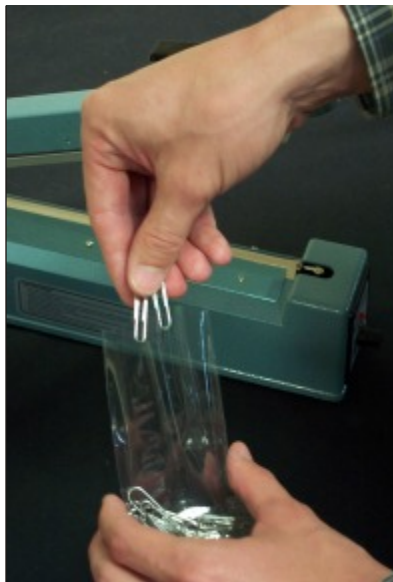

2. Open bag and insert contents.



3. Holding bag in left hand place open end of bag on sealing pad.



4. To seal only, bring sealing arm down (light pressure) onto the film and pad.

To cut-and-seal while depressing the sealing arm, tear the package away with your left hand.



5. Example of sealed bag.

Note: Cut-and-seal bags do not have bag material above the seal.